


## Nylon Adapters PG to METRIC Threads

These **ADAPTERS** will allow you to switch between NPT, PG & Metric threads to fit your specific application needs. The use of a **THREADED ADAPTER** is usually the quickest, easiest & most affordable solution to adapt, reduce or enlarge the thread size on any threaded connector or plug.

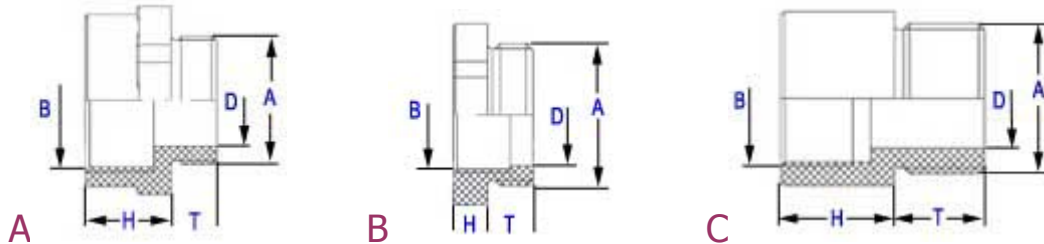

### TECHNICAL INFORMATION

#### SPECIFICATIONS

**MATERIALS:**  
Black Nylon

#### OPERATING TEMPERATURE

-4°F to 176 °F  
(-20°C to 80°C)

## PG to METRIC THREADS

Part Nr.	Type	Male Thread	Female Thread	Thread Length	Height	Inner Diameter	Wrench Flats
		A	B	T	H	D	W
AP-0712-BK	C	PG 7	M12 x 1,5	.59 (15)	.75 (19)	.24 (6)	--
AP-0912-BK	C	PG 9	M12 x 1,5	.59 (15)	.75 (19)	.33 (8.5)	--
AP-0916-BK	A	PG 9	M16 x 1,5	.31 (8)	.47 (12)	.35 (9)	.83 (21)
AP-1116-BK	C	PG 11	M16 x 1,5	.59 (15)	.75 (19)	.45 (11.5)	--
AP-1120-BK	C	PG 11	M20 x 1,5	.59 (15)	.75 (19)	.45 (11.5)	--
AP-1316-BK	B	PG 13,5	M16 x 1,5	.31 (8)	.24 (6)	.55 (14)	.98 (25)
AP-1320-BK	A	PG 13,5	M20 x 1,5	.31 (8)	.51 (13)	.55 (14)	.98 (25)
AP-1620-BK	A	PG 16	M20 x 1,5	.31 (8)	.51 (13)	.63 (16)	1.06 (27)
AP-1625-BK	A	PG 16	M25 x 1,5	.31 (8)	.59 (15)	.63 (16)	1.18 (30)
AP-2125-BK	C	PG 21	M25 x 1,5	.59 (15)	.75 (19)	.81 (20.5)	--
AP-2132-BK	A	PG 21	M32 x 1,5	.31 (8)	.59 (15)	.83 (21)	1.46 (37)
AP-2932-BK	C	PG 29	M32 x 1,5	.59 (15)	.75 (19)	1.10 (28)	--
AP-2940-BK	A	PG 29	M40 x 1,5	.39 (10)	.67 (17)	1.18 (30)	1.77 (45)
AP-3640-BK	C	PG 36	M40 x 1,5	.59 (15)	.20 (5)	1.50 (38)	--
AP-3650-BK	C	PG 36	M50 x 1,5	.59 (15)	.77 (19.5)	1.46 (37)	--
AP-4240-BK	C	PG 42	M40 x 1,5	.59 (15)	.20 (5)	1.50 (38)	--
AP-4250-BK	C	PG 42	M50 x 1,5	.59 (15)	.77 (19.5)	1.69 (43)	--
AP-4850-BK	C	PG 48	M50 x 1,5	.59 (15)	.20 (5)	1.50 (38)	--
AP-4863-BK	C	PG 48	M63 x 1,5	.59 (15)	.78 (20)	1.89 (48)	--

[ NOTE : TECHNICAL SPECIFICATIONS MAY CHANGE, WITHOUT ANY PRIOR NOTIFICATION ]



NOVAMAX INDUSTRIAL INTL LLC 8200 S Quebec St Suite A-3 Englewood, CO 80112  
Phone (303) 470-7226 Fax (303) 470-5773 Toll-Free 1-800-594-3380 www.novamaxindustrial.com

