


Nickel Plated Brass Adapters – NPT to PG Threads

These **ADAPTERS** will allow you to switch between NPT, PG & Metric threads to fit your specific application needs. The use of a **THREADED ADAPTER** is usually the quickest, easiest & most affordable solution to adapt, reduce or enlarge the thread size on any threaded connector or plug.

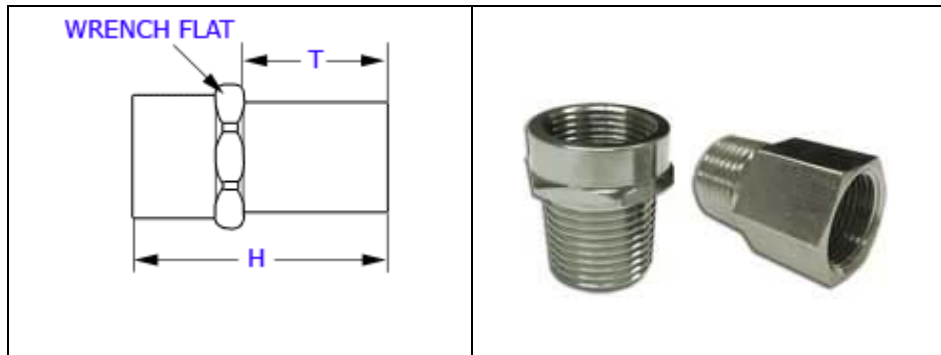

TECHNICAL INFORMATION

SPECIFICATIONS

MATERIALS: Nickel Plated Brass
O-Ring: Buna-N / Viton® (Optional)

OPERATING TEMPERATURE

-40°F to 212°F
 (-40°C to 100°C)

ADAPTERS - NPT to PG THREADS

Part Nr.	Male Thread	Female Thread	Wrench Flats	Thread Length	Height
	A	B	W	T	H
AN-1407-BR	1/4" NPT	PG 7	.75 (19)	.59 (15)	.98 (25)
AN-1209-BR	1/2" NPT	PG 9	1.02 (26)	.79 (20)	1.18 (30)
AN-1211-BR	1/2" NPT	PG 11	1.02 (26)	.79 (20)	1.18 (30)
AN-1213-BR	1/2" NPT	PG 13	.63 (16)	.79 (20)	1.18 (30)
AN-1221-BR	1/2" NPT	PG 21	1.30 (33)	.79 (20)	1.26 (32)
AN-3421-BR	3/4" NPT	PG 21	1.30 (33)	.71 (18)	1.26 (32)
AN-1029-BR	1" NPT	PG 29	1.61 (41)	.98 (25)	1.38 (35)
AN-5429-BR	1-1/4" NPT	PG 29	1.61 (41)	.94 (24)	1.38 (35)

[NOTE : TECHNICAL SPECIFICATIONS MAY CHANGE, WITHOUT ANY PRIOR NOTIFICATION]



NOVAMAX INDUSTRIAL INTL LLC 8200 S Quebec St Suite A-3 Englewood, CO 80112
 Phone (303) 470-7226 Fax (303) 470-5773 Toll-Free 1-800-594-3380 www.novamaxindustrial.com

