


Nickel Plated Brass Adapters – NPT to METRIC Threads

These **ADAPTERS** will allow you to switch between NPT, PG & Metric threads to fit your specific application needs. The use of a **THREADED ADAPTER** is usually the quickest, easiest & most affordable solution to adapt, reduce or enlarge the thread size on any threaded connector or plug.

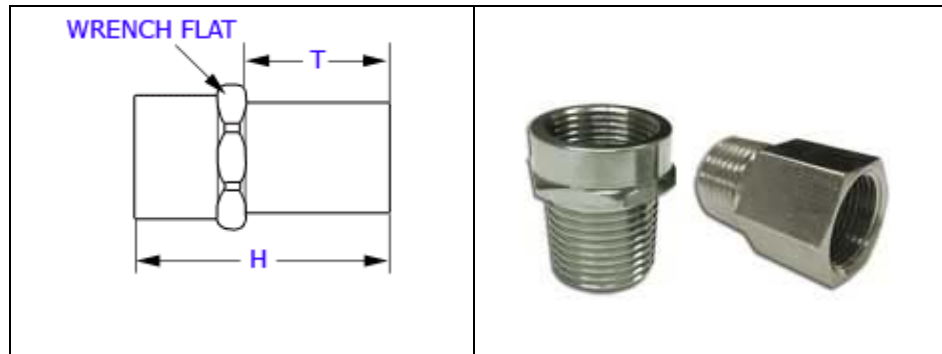

TECHNICAL INFORMATION

SPECIFICATIONS

MATERIALS: Nickel Plated Brass
O-Ring: Buna-N / Viton® (Optional)

OPERATING TEMPERATURE

-40°F to 212°F
 (-40°C to 100°C)

ADAPTERS - NPT to METRIC THREADS

Part Nr.	Male Thread	Female Thread	Wrench Flats	Thread Length	Height
	A	B	W	T	H
AT-1216-BR	1/2" NPT	M16 x 1,5	.63 (16)	.79 (20)	1.18 (30)
AT-1220-BR	1/2" NPT	M20 x 1,5	.98 (25)	.79 (20)	1.18 (30)
AT-1225-BR	1/2" NPT	M25 x 1,5	1.26 (32)	.79 (20)	1.18 (30)
AT-3425-BR	3/4" NPT	M25 x 1,5	1.24 (31.6)	.75 (19)	1.18 (30)
AT-1032-BR	1" NPT	M32 x 1,5	1.46 (37)	.63 (16)	1.30 (33)
AT-5432-BR	1-1/4" NPT	M32 x 1,5	1.46 (37)	.67 (17)	1.30 (33)

[NOTE : TECHNICAL SPECIFICATIONS MAY CHANGE, WITHOUT ANY PRIOR NOTIFICATION]



NOVAMAX INDUSTRIAL INTL LLC 8200 S Quebec St Suite A-3 Englewood, CO 80112
 Phone (303) 470-7226 Fax (303) 470-5773 Toll-Free 1-800-594-3380 www.novamaxindustrial.com

