


Nickel Plated Brass Reducers – PG to PG Threads

Is your thread size off by one size? Well, then these **REDUCERS** will solve that threading problem. They convert holes which fit NPT / PG / Metric threads to a larger female thread of the same thread type.

The use of a **THREADED REDUCER** is usually the quickest, easiest & most affordable solution to enlarge the thread size on any threaded connector or plug.

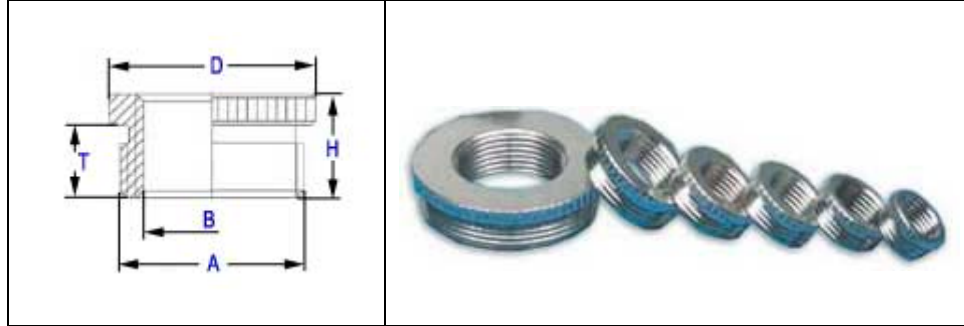

TECHNICAL INFORMATION

SPECIFICATIONS

MATERIALS: Nickel Plated Brass
O-Ring: Buna-N / Viton® (Optional)

OPERATING TEMPERATURE

-40°F to 212°F
 (-40°C to 100°C)

REDUCERS - PG to PG THREADS

Part Nr.	Male Thread	Female Thread	Outer Diameter	Thread Length	Height
	A	B	D	T	H
RR-0907-BR	PG 9	PG 7	.67 (17)	.24 (6)	.33 (8.5)
RR-1107-BR	PG 11	PG 7	.79 (20)	.24 (6)	.33 (8.5)
RR-1109-BR	PG 11	PG 9	.79 (20)	.24 (6)	.33 (8.5)
RR-1309-BR	PG 13	PG 9	.87 (22)	.26 (6.5)	.35 (9)
RR-1311-BR	PG 13	PG 11	.87 (22)	.26 (6.5)	.35 (9)
RR-1609-BR	PG 16	PG 9	.94 (24)	.26 (6.5)	.37 (9.5)
RR-1611-BR	PG 16	PG 11	.94 (24)	.26 (6.5)	.37 (9.5)
RR-1613-BR	PG 16	PG 13,5	.94 (24)	.26 (6.5)	.37 (9.5)
RR-2111-BR	PG 21	PG 11	1.18 (30)	.27 (7)	.39 (10)
RR-2113-BR	PG 21	PG 13	1.18 (30)	.27 (7)	.39 (10)
RR-2116-BR	PG 21	PG 16	1.18 (30)	.27 (7)	.39 (10)
RR-2916-BR	PG 29	PG 16	1.53 (39)	.31 (8)	.45 (11.5)
RR-2921-BR	PG 29	PG 21	1.53 (39)	.31 (8)	.45 (11.5)
RR-3621-BR	PG 36	PG 21	1.97 (50)	.35 (9)	.49 (12.5)
RR-3629-BR	PG 36	PG 29	1.97 (50)	.35 (9)	.49 (12.5)
RR-4229-BR	PG 42	PG 29	2.24 (57)	.39 (10)	.55 (14)
RR-4236-BR	PG 42	PG 36	2.24 (57)	.39 (10)	.55 (14)
RR-4836-BR	PG 48	PG 36	2.52 (64)	.39 (10)	.55 (14)
RR-4842-BR	PG 48	PG 42	2.52 (64)	.39 (10)	.55 (14)

[NOTE : TECHNICAL SPECIFICATIONS MAY CHANGE, WITHOUT ANY PRIOR NOTIFICATION]



NOVAMAX INDUSTRIAL INTL LLC 8200 S Quebec St Suite A-3 Englewood, CO 80112
 Phone (303) 470-7226 Fax (303) 470-5773 Toll-Free 1-800-594-3380 www.novamaxindustrial.com

