


Nylon Adapters METRIC to PG Threads

These **ADAPTERS** will allow you to switch between NPT, PG & Metric threads to fit your specific application needs. The use of a **THREADED ADAPTER** is usually the quickest, easiest & most affordable solution to adapt, reduce or enlarge the thread size on any threaded connector or plug.

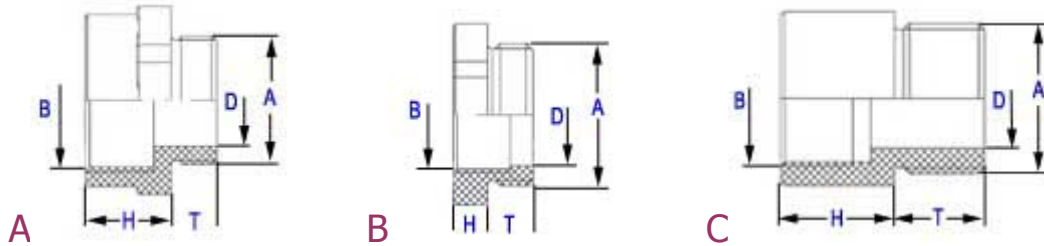

TECHNICAL INFORMATION

SPECIFICATIONS

MATERIALS:
Black Nylon

OPERATING TEMPERATURE

-4°F to 176 °F
(-20°C to 80°C)

METRIC to PG THREADS

Part Nr.	Type	Male Thread	Female Thread	Thread Length	Height	Inner Diameter	Wrench Flats
		A	B	T	H	D	W
AF-1207-BK	A	M12 x 1,5	PG 7	.31 (8)	.47 (12)	.26 (6.5)	.67 (17)
AF-1609-BK	C	M16 x 1,5	PG 9	.04 (1)	.75 (19)	.33 (8.5)	--
AF-2013-BK	A	M20 x 1,5	PG 13,5	.31 (8)	.51 (13)	.55 (14)	.98 (25)
AF-2513-BK	B	M25 x 1,5	PG 13,5	.31 (8)	.24 (6)	.71 (18)	--
AF-2516-BK	A	M25 x 1,5	PG 16	.31 (8)	.55 (14)	.71 (18)	1.14 (29)
AF-3221-BK	A	M32 x 1,5	PG 21	.39 (10)	.59 (15)	.98 (25)	1.14 (29)
AF-4029-BK	A	M40 x 1,5	PG 29	.39 (10)	.59 (15)	1.30 (33)	1.42 (36)
AF-5036-BK	A	M50 x 1,5	PG 36	.47 (12)	.67 (17)	1.69 (43)	1.77 (45)
AF-6342-BK	C	M63 x 1,5	PG 42	.59 (15)	.20 (5)	2.05 (52)	2.16 (55)
AF-6348-BK	C	M63 x 1,5	PG 48	.59 (15)	.78 (20)	2.01 (51)	2.68 (68)

[NOTE : TECHNICAL SPECIFICATIONS MAY CHANGE, WITHOUT ANY PRIOR NOTIFICATION]



NOVAMAX INDUSTRIAL INTL LLC 8200 S Quebec St Suite A-3 Englewood, CO 80112
Phone (303) 470-7226 Fax (303) 470-5773 Toll-Free 1-800-594-3380 www.novamaxindustrial.com